



INSTALLATION INSTRUCTIONS FOR PART 99-7518B

INSTALLATION INSTRUCTIONS FOR PART 99-7518B

APPLICATIONS MAZDA 2 2007-UP

99-7518B


KIT FEATURES

- DIN Head Unit Provision w/ Pocket
- ISO DIN Head Unit Provision w/ Pocket
- DDIN Head Unit Provision
- ISO Stacked Head Unit Provision
- Painted Matte Black



KIT COMPONENTS

- A) Radio Housing • B) ISO Brackets • C) ISO Trim Plate • D) DDIN Brackets
- E) DDIN Trim Plate • F) (6) Panel Clips • G) Pocket

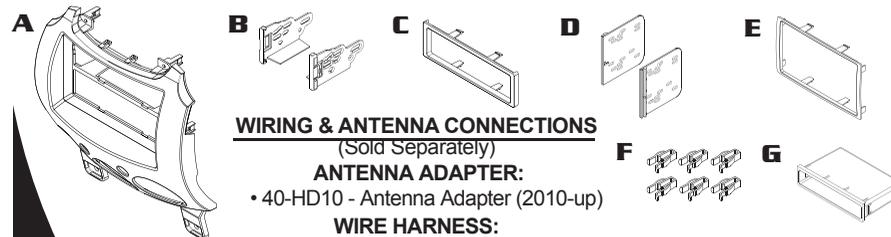

WIRING & ANTENNA CONNECTIONS (Sold Separately)

ANTENNA ADAPTER:

- 40-HD10 - Antenna Adapter (2010-up)

WIRE HARNESS:

- 70-7903 Mazda 2001-UP

TOOLS REQUIRED

- Phillips Screwdriver • Panel Removal Tool • Socket Wrench
- Cutting Tool or File



METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2010 METRA ELECTRONICS CORPORATION

METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2010 METRA ELECTRONICS CORPORATION




REV. 3/09/2010

99-7518B KIT ASSEMBLY

99-7518B KIT PREPARATION


MAZDA 2 2007-UP DDIN HEAD UNIT PROVISION

- 1** Cut and remove the center bar from the radio housing. (Fig. A)
- 2** Snap the Double DIN brackets to the inside edges of the Double DIN trim plate. (Fig. B)
- 3** Slide the Double DIN head unit or stacked ISO head units into the bracket/radio housing assembly and secure the Double DIN head unit or stacked ISO head units to the assembly using the screws supplied with the radio. (Fig. C)
- 4** Snap the double DIN trim plate into the radio housing. (Fig. C)
- 5** Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXCESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 6** Reassemble dash in reverse order of disassembly.

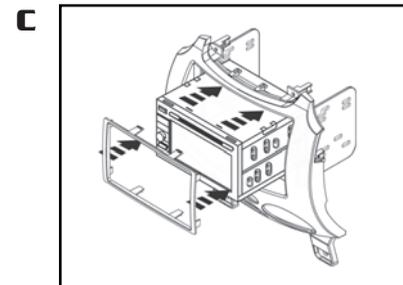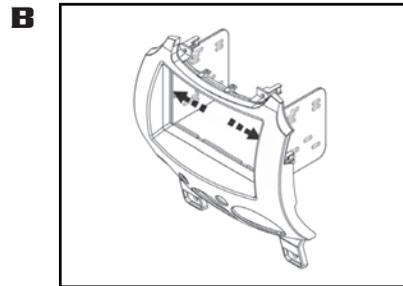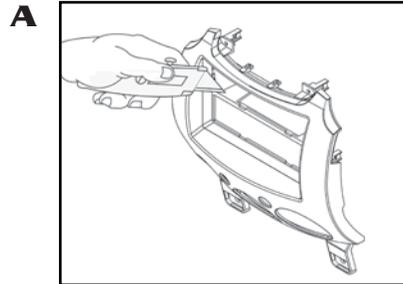




MAZDA 2 2007-UP

- 1** Slide the (6) plastic Panel Clips provided with this kit onto the legs located on the back of the Radio Housing. (Fig. A)

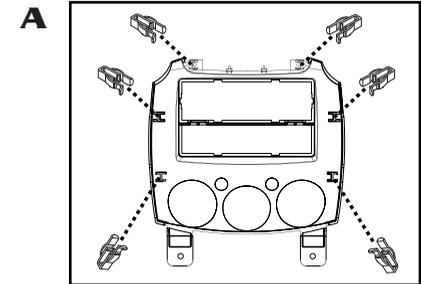

MAZDA 2 2007-UP DIN HEAD UNIT PROVISION

- 1** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Fig. A)
- 2** Snap the pocket into the bottom opening of the radio housing. (Fig. B)
- 3** Slide the aftermarket head unit into the cage and secure. (Fig. C)
- 4** Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
- 5** Reassemble dash in reverse order of disassembly.

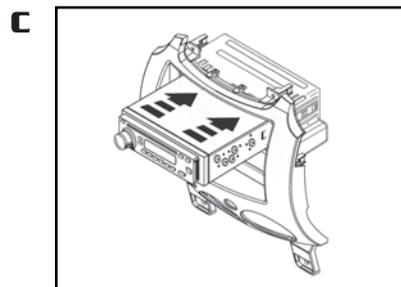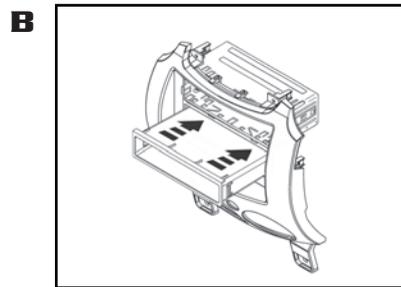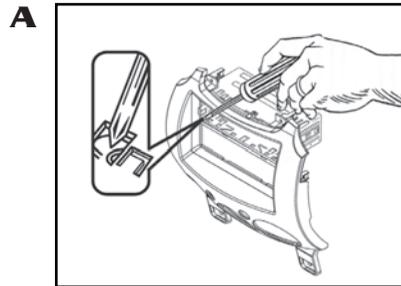

MAZDA 2 2007-UP ISO DIN HEAD UNIT PROVISION

- 1** Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Fig. A)
- 2** Snap the pocket into the bottom opening of the radio housing. (Fig. B)
- 3** Slide the head unit into the radio opening until the side clips engage. (Fig. B)
- 4** Snap the Trim plate into the Radio Housing. (Fig. C)
- 5** Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
- 6** Reassemble dash in reverse order of disassembly.

