

AUX-In Interface

AUX-110

Audi MMI 2G

**BMW Professional radio, Business and
Professional navigation systems (CCC, CIC),**

**Mercedes Benz Audio5, Audio20, APS50,
Comand APS NTG1/NTG2,**

Porsche PCM2.1

Contents

1. Prior to installation

- 1.1. Delivery contents
- 1.2. Check compatibility of vehicle and accessories

2. Installation

- 2.1. Selection of vehicle (blue wire)
- 2.2. Installation example Audi MMI 2G
- 2.3. Installation example Porsche Cayenne PCM2.1
- 2.4. Exception: Vehicles without optical lead components BMW
- 2.5. Exception: Vehicles without optical lead components Mercedes/Porsche

3. Operation

4. Specifications

5. Technical support

Information

Changes/updates of the vehicle's software can cause malfunctions of the interface. We offer free software-updates for our interfaces for one year after purchase. To receive a free update, the interface must be sent in at own cost. Labor cost for and other expenses involved with the software-updates will not be refunded.

1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

1.1. Delivery contents

Take down the SW-version and HW-version of the interface boxes, and store this manual for support purposes.



AUX-110 HW_____ SW_____

1.2. Check compatibility of vehicle and accessories

Requirements

Navigation/Radio

Audi MMI 2G
BMW Professional radio, Business and Professional navigation systems (CCC, CIC)
Mercedes Audio5, Audio20, APS50, Comand APS NTG1/NTG2
Porsche PCM2.0, PCM2.1

Limitations

Factory CD-changer

On Audi one factory CD-changer can be installed additionally. BMW, Mercedes and Porsche existing factory CD-changers must be removed.

BMW without MOST®-components

If factory CD-changer has never been installed, the head-unit needs to be coded to CD-changer by diagnosis computer or OBD-xxx-CD-xx activator.

Mercedes/Porsche without MOST®-components

MOST®-ring needs to be activated by diagnosis computer

2. Installation

Switch off ignition and disconnect the vehicle's battery!

The interface needs a permanent 12V source. If power source is not taken directly from the battery, the connection has to be checked for being start-up proven and permanent.

Installation on BMW or Mercedes analogue to installation examples of Audi and Porsche.

2.1. Vehicle selection (blue wire)


For installation on Audi, Mercedes or Porsche, blue wire is not connected and needs to be isolated.

For installation on BMW connect blue wire constantly to ground (GND).

2.2. Installation example Audi MMI 2G

Remove MOST®-connector from the rear of the factory CD changer and integrate Interface according to schema. Obey arrows on the MOST®-connectors as well as the order of components.

Connect black wire to ground and red wire to permanent +12V. Isolate blue wire.

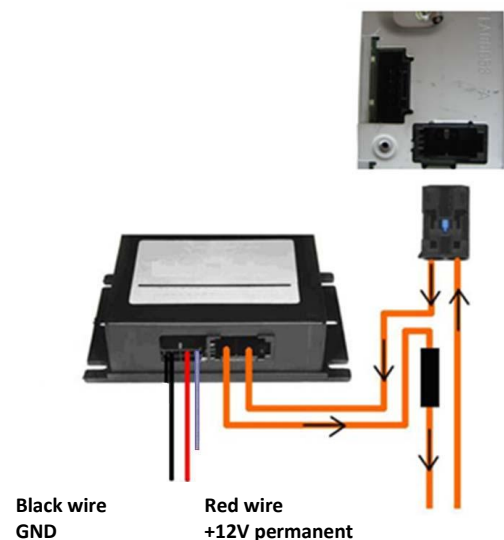

2.3. Installation example Porsche Cayenne PCM 2.1

Remove plastic cover.

Remove 4 torx screws and pull out head-unit from the dash-board.



Remove MOST®-connector from the rear of the factory CD changer and integrate Interface according to schema. Obey arrows on the MOST®-connectors.



Connect black wire to ground and red wire to permanent +12V. Isolate blue wire.



2.4. Exception: Vehicles without optical lead components BMW

Vehicles without MOST®-components, which means without factory CDC, without factory phone or other MOST®-components have optical leads at the navigation computer, but it can be possible that the optical ring is not closed at the diagnostic connector in the glove compartment. In this case a connector bridge for optical wires is necessary.

2.5. Exception: Vehicles without optical lead components Mercedes/Porsche

The MOST®-ring (optical) needs to be opened/activated by diagnosis computer.

3. Operation


The AUX-110 emulates a factory CD-changer and is recognized as such by the head-unit. The AUX-input is activated by playing CD1 on the head-unit.

Note: On Audi with one factory CD-changer installed, the AUX-110 emulates a second factory CD-changer. Play CD7 to activate AUX-input.



4. Specifications

| | |
|-----------------------------------|------------------|
| Operation voltage | 10.5 – 14.8V |
| Stand-by power drain | <1mA |
| Operation power drain | 120mA |
| Power consumption | 1.8W |
| Temperature range | -30°C bis +80°C |
| Weight | 95g |
| Measurements (box only) B x H x T | 106 x 30 x 71 mm |



5. Technical Support

Caraudio-Systems Vertriebs GmbH
manufacturer/distribution
 Rheinhorststr. 22
 D-67071 Ludwigshafen am Rhein

NavLinkz GmbH
corporate sales/tech support
 Eurotec-Ring 45
 D-47445 Moers

phone +49 180 3 907050
 email support@caraudio-systems.de

Legal disclaimer: Mentioned company and trademarks, as well as product names/codes are registered trademarks ® of their corresponding legal owners.