


9. Attach mounting brackets to 2-DIN head unit

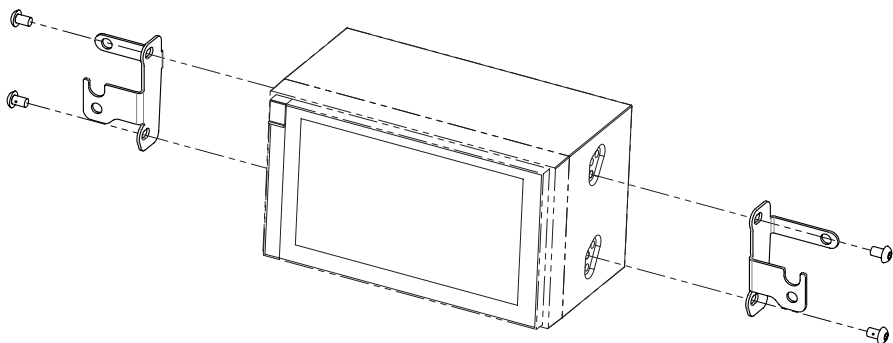

Double-DIN Kit Installation Manual

part-no.: 381230-31-1
colour: piano black

Opel Karl 2015->

Only compatible with mechless units (max. depth 120 mm)




10. Connect all cables
Place 2-DIN head unit onto dash board

Fix 2-DIN head unit using the original screws



11. Connect hazard light switch
Place new facia plate on dash board until it snaps in to finish installation

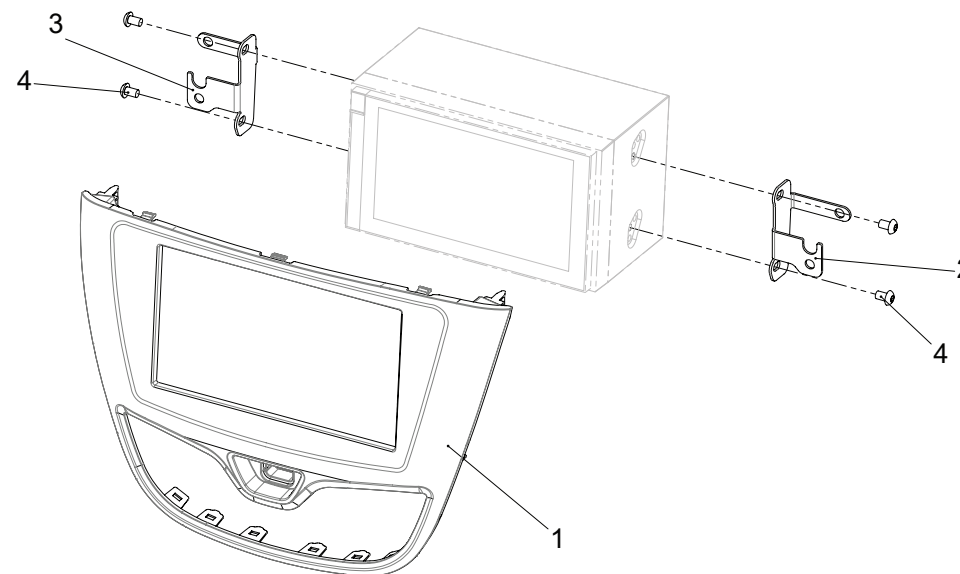

Kit Content

- | | |
|----------------------------|---------------------------|
| (1) Facia Plate | (3) Mounting bracket left |
| (2) Mounting bracket right | (4) flat headed screw |

*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*



1. Opel Karl OEM dash board



2. Unclip OEM panel
Unplug hazard light switch
and remove OEM panel



3. Remove 2 screws
of OEM head unit
(see arrows)



4. Unplug all connectors
Remove OEM head unit




5. Unclip and remove
hazard light switch
from OEM panel



6. Place hazard light switch
onto new 2-DIN facia plate



7. Unclip and remove air vents
from OEM panel

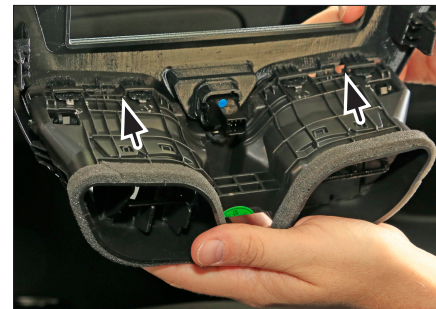

8 . Place air vents onto
new 2-DIN facia plate