

# Product Description:

---

**Item:**

**RSE-RGB03**

**Function:**



This interface allows for the connection of two additional monitors to a VW MFD3 / RNS510 system version **B** (incl. audio output).

For use with the following systems:

VW with MFD3 / RNS510 system:

- Golf5, Passat, Touran
- Touareg, T5

---

## Connection Assignment:

Wire Colors / Plugs:	Connection / Assignment:
26pin AMP plug:	Video input
● Red:	+12V DC (switched plus)
● Black:	GND
● Cinch-Socket:	Audio Output– right
● Cinch-Socket:	Audio Output– left
● Cinch-Socket-Interface:	Video Output 1
● Cinch-Socket-Interface:	Video Output 2

---

## Installation:

---


### Instructions for VW Golf 5, Touran, Passat :

**Warning: Please do not attempt to install the interface while the ignition is turned on!**

1. Carefully remove decorative cover of navigation system (held in place by 8 latches) using an appropriate leverage tool. Remove the 4 TORX-screws as marked in the picture on the right and extract the device from the center console.



- 
2. Disconnect Quadlock connector from navigation system.  
Connect 26pin AMP socket of the cable kit to the navigation system.

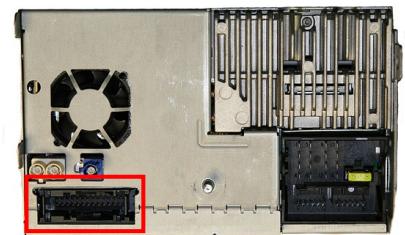

- 
3. Connect the black wire to ground.  
Connect the red wire with switched plus (+12V).

- 
4. Reconnect Quadlock connector to navigation system.  
Connect the cinch socket(s) of the interface to the external monitor(s) and remount the system in the center console.



Stereo Audio Output



Video Output

---

---


## Instructions for VW Touareg and T5:

**Warning: Please do not attempt to install the interface while the ignition is turned on!**

1. Removing the navigation system from the center console requires the use of a brand-specific de-locking tool (sold separately).



2. Disconnect Quadlock connector from navigation system. Connect 26pin AMP socket of the cable kit to the navigation system.

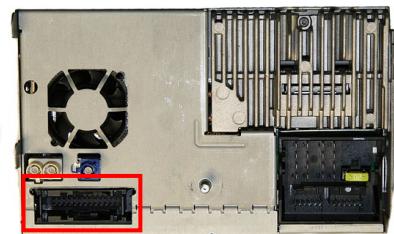

3. Connect the black wire to ground. Connect the red wire with switched plus (+12V).

4. Reconnect Quadlock connector to navigation system. Connect the cinch socket(s) of the interface to the external monitor(s) and remount the system in the center console.



Stereo Audio Output



Video Output

# Functionality:

---

---

## Activation:

In order to activate DVD video picture at the video output of the interface, first access the "Audio Settings" menu by pushing the "TONE" button followed by selecting DVD as source at the "AV-Output" menu.



The video / audio output option is only possible in conjunction with MFD3 / RNS510 version **B**:

1T0 035 680 **B**

