

## **TV-Free** Video-in-motion Interface

### **TF-NTG3**

## **For Mercedes Benz NTG 3 and NTG 3.5 navigation systems**

### **Legal Information**

By law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving, for example the MP3 menu for DVD upgrades.

Changes/updates of the vehicle's software can cause malfunctions of the interface. We offer free software-updates for our interfaces for one year after purchase. To receive a free update, the interface must be sent in at own cost. Labor cost for and other expenses involved with the software-updates will not be refunded.

## Contents

### 1. Prior to installation

- 1.1. Delivery contents
- 1.2. Check compatibility of vehicle and accessories
- 1.3. Setting the Dip-switches of the CAN-Box TV-500
- 1.4. Pin-assignments

### 2. Installation

### 3. Activation of the video-in-motion function

### 4. Specifications

### 5. Technical support

## 1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

### 1.1. Delivery contents

*Take down the SW-version and HW-version of the interface boxes, and store this manual for support purposes.*

CAN-box TV-500  
HW \_\_\_\_\_ SW \_\_\_\_\_



## 1.2. Check compatibility of vehicle and accessories

| Requirements      |  |
|-------------------|--|
| <i>Vehicle</i>    | Mercedes Benz S-class (W221) from 10/05, CL-class (W216) from 2006, CL-class (W216) with Dual-View |
| <i>Navigation</i> | NTG 3, NTG 3.5   |

## 1.3. Setting the Dip-switches of the Can-Box TV-500

| Vehicle/ navigation   | Dip 1 | Dip 2 | Dip 3 | Dip 4 | Dip 5 | Dip 6 |
|---|-------|-------|-------|-------|-------|-------|
| Video-in-motion permanent   | ON    | OFF   | OFF   | OFF   | ON    | ON    |
| Video-in-motion selective*  | OFF   | OFF   | OFF   | OFF   | ON    | ON    |
| S-Klasse (W221) with factory rear-view camera and video-in-motion permanent | ON    | ON    | OFF   | OFF   | ON    | ON    |

\* With dip1 to OFF the included green cable is used to activate the video-in-motion function.

**Note:** Dip switch functions of the TV-500

Dip 1 – activation TV-free

Dip 2 – no function; S-Class (W221) rear-view camera existing

Dip 3 – no function

Dip 4 – no function

Dip 5 – CAN-bus termination resistor on the vehicle side

Dip 6 – CAN-bus termination resistor on the head-unit side

## 1.4. Pin-assignments

### Pin-assignment vehicle connector

| Cable colour   | Assignment     |
|----------------|----------------|
| ● Yellow/White | CAN-HIGH Pin 1 |
| ● Yellow       | CAN-LOW Pin 11 |

### Pin-assignment of the CAN-Box TV-500 (Molex 8pin)

| Cable colour    | Pin-No. | Assignment  |
|-----------------|---------|---|
| ● Yellow        | Pin 4   | CAN-HIGH – connection to the head-unit                                |
| ● Blue          | Pin 3   | CAN-LOW – connection to the head-unit                                 |
| ●● Yellow/Black | Pin 8   | CAN-HIGH – connection to the vehicle                                  |
| ●● Blue/Black   | Pin 7   | CAN-LOW – connection to the vehicle                                   |
| ● Red           | Pin 1   | +12V permanent  |
| ● Black         | Pin 5   | Ground  |
| ● Green         | Pin 6   | Activation of the video-in-motion function (+12V = TV-free activated) |
| ● White         | Pin 2   | Trigger output (+12V DC 500mA)  |

## 2. Installation

**Switch off ignition and disconnect the vehicle's battery! If according to factory rules disconnecting the battery has to be avoided, it is usually sufficient to put the vehicle in sleep-mode. In case the sleep-mode does not show success, disconnect the battery with a resistor lead.**


The interface is assembled in the centre stack directly behind the DVD unit (Comand). For this purpose, it must be dismantled and disconnected from the mains.



Remove the panel under the drawer (panel is slotted).




Open the drawer. Loosen the 4 Comand torx screws (2 respectively on each side).

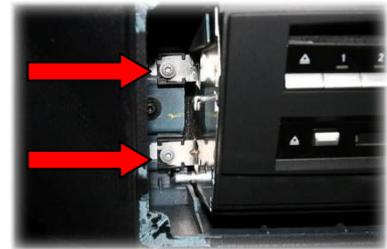



Unplug the Comand and unplug the 20-pin socket.



Unplug the insert from the 20-pin socket.

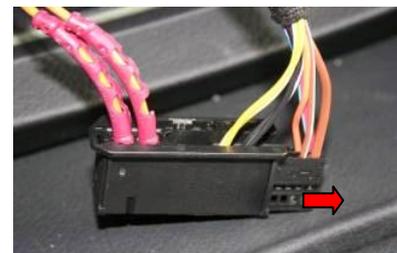


Loosen Pin 1 (yellow / white cable, CAN HIGH) and Pin 11 (yellow cable, CAN LOW) from the 20-pin socket and, as shown in the right-hand-side illustration, pin it in the included 3-pin socket.

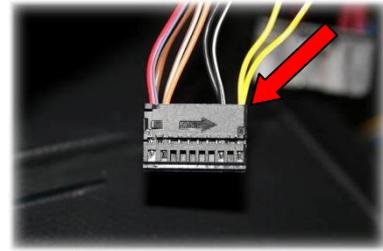

Connect the 3-pin socket with the counterpart on the cable set.



Pin the yellow / black cable from the cable set TV-NTG3 into Pin1 chamber and blue /black cable into the Pin11 chamber of the 20-pin socket. Connect the black cable from the cable set TV-NTG3 to Pin20 (earth), connect the red cable parallel to Pin10 (+12V) of the 20-pin socket.

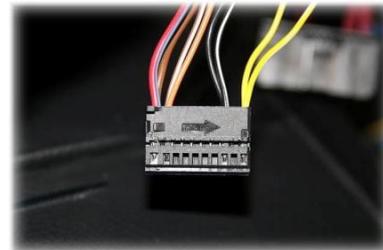

### 3. Activation of the video-in-motion function

The video-in-motion can be activated and deactivated by Dip 1 or alternatively by the included loose green cable in connection with a switch (not included in delivery).

#### Video-in-motion permanent

With dip1 to ON the video-in-motion function is activated permanently without disturbing the navigation performance.

#### Video-in-motion selective

With dip1 to OFF the included green cable is used to activate the video-in-motion function.


Connect a switch to the green cable and connect the green cable to +12V ACC.

- +12V = TV-Free is activated
- 0V = TV-Free is not activated

**Note:** The loose white cable is not required and must be isolated.

## 4. Specifications

|                                   |                 |
|-----------------------------------|-----------------|
| Operation voltage                 | 10.5 – 14.8V    |
| Stand-by power drain              | <2mA            |
| Operation power drain             | ~60mA           |
| Power consumption                 | ~0,08W          |
| Temperature range                 | -30°C to +80°C  |
| Weight                            | 44g             |
| Measurements (box only) W x H x D | 76 x 27 x 54 mm |

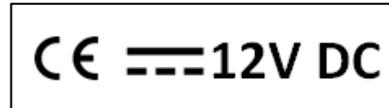

## 5. Technical Support

**Caraudio-Systems Vertriebs GmbH**  
*manufacturer/distribution*  
Rheinhorststr. 22  
D-67071 Ludwigshafen am Rhein

**NavLinkz GmbH**  
*corporate sales/tech dealer support*  
Eurotec-Ring 45  
D-47445 Moers

phone +49 180 3 907050  
email [support@caraudio-systems.de](mailto:support@caraudio-systems.de)

**Legal disclaimer:** Mentioned company and trademarks, as well as product names/codes are registered trademarks ® of their corresponding legal owners.