




# CTSRN011.2

## Steering Wheel Control Interface for Renault Vehicles

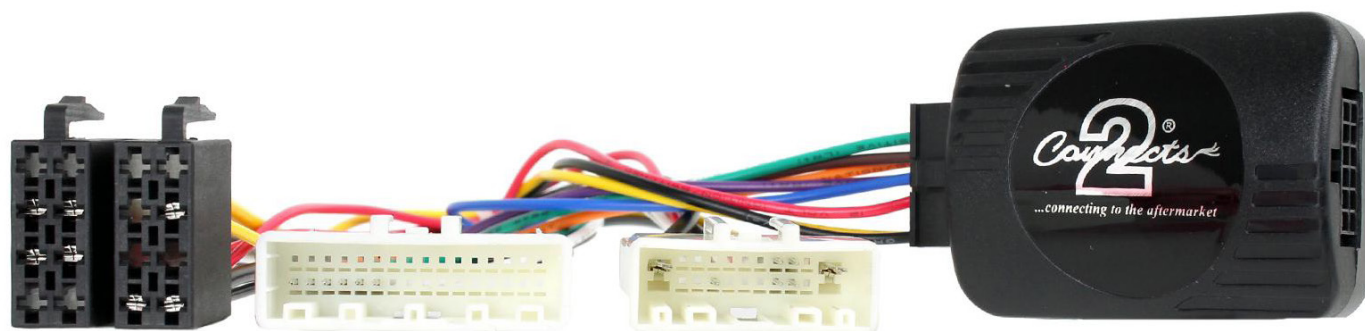

Contents (Left to Right):

- i. ISO Connector (16 Pin)
- ii. Vehicle Specific Connector (32-pin)
- iii. Vehicle Specific Connector (20-pin)
- iv. Interface

Designed and  
Engineered  
in the UK. 

## APPLICATION

*Note: Application data is subject to change at any time*

Renault Master	2015 >
Renault Traffic (III)	2015 >
Renault Twingo (III)	2014 >

## FEATURES

- Retains Factory Steering Wheel Control Functionality
- Retains Phone Button Functionality *(if vehicle is equipped)*
- Updateable via USB *(contact supplier for more information)*

### DISCLAIMER

*The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.*

# PRODUCT INFORMATION

## CTSRN011.2

The CTSRN011.2 is an Analogue steering wheel control interface that allows the installation of an aftermarket single or double stereo into select Renault vehicles. This interface and harness combination allows the retention of select steering wheel controls and phone button functionality (if applicable).

## WIRING KEY

### IN WIRING HARNESS

Purple	Right Rear Speaker +	Yellow	Permanent 12V
Purple/Black	Right Rear Speaker -	Black	Ground
Green	Left Rear Speaker +	Red	Ignition 12V
Green/Black	Left Rear Speaker -		
Grey	Right Front Speaker +		
Grey/Black	Right Front Speaker -		
White	Left Front Speaker +		
White/Black	Left Front Speaker -		


### ADDITIONAL CONNECTIONS

None

## STEERING WHEEL CONTROL FUNCTIONALITY

The following diagram, though based on careful research, is an example only. Individual steering wheel control configurations may differ.

**NB: steering wheel controls can be adjusted through the change of the Dipswitch within the interface box. This is dependent on the type of steering wheel layout the vehicle has. See information below before installation.**

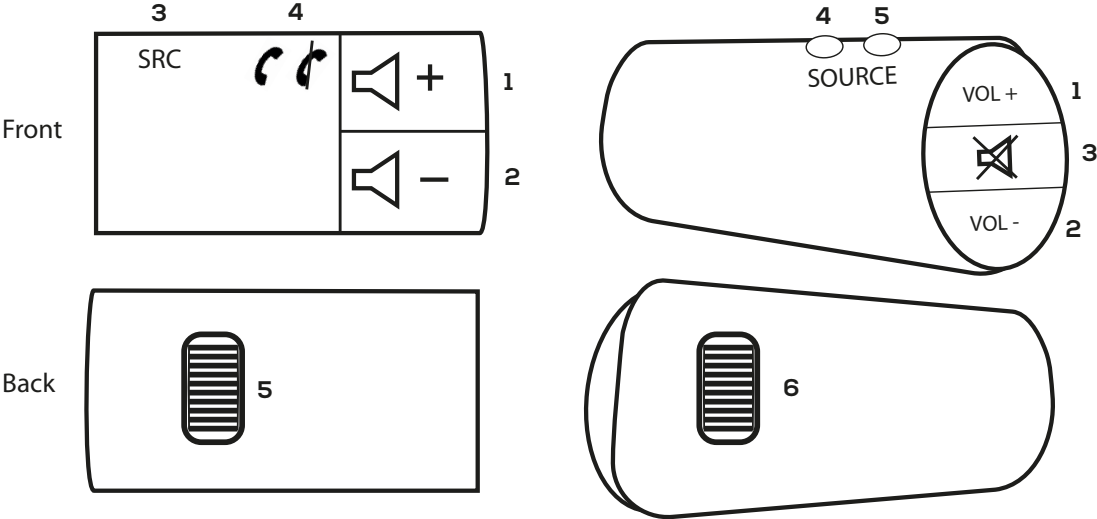

#### Config A.

- 1. Volume +
- 2. Volume -
- 1&2. Mute (Pressed together)
- 3. Source
- 4. Source (Dipswitch OFF)  
Pick Up (Short Press) (Dipswitch ON)  
Hang Up (Long Press)
- 5. Track + / Track -

#### Config B.

- 1. Volume +
- 2. Volume -
- 1&2. Mute (Pressed together)
- 3. Mute (Dipswitch ON)  
Pick Up (Short Press) (Dipswitch OFF)  
Hang Up (Long Press)
- 4. Source
- 5. Source (Dipswitch OFF)  
Pick Up (Short Press) (Dipswitch ON)  
Hang Up (Long Press)
- 6. Track + /Track -

# PRIOR TO INSTALLATION

---

*Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product. Connects2 can not be held responsible for the installation of this product.*

## INSTALLATION GUIDE

---

*See wiring diagram on Pg.4 for more information*

*Before installing the interface, the factory stereo must be removed and disconnected. To do this, please consult the vehicle owner's manual/handbook or contact a fitting professional.*

*A stereo connection (patch) lead is also required for the installation of this interface (supplied separately). Please ensure that you have the correct lead before proceeding. For universal patch leads, prepare the wiring loops in accordance with the instruction manual supplied with the product before installation.*

1. Connect the 12 Pin connector from the stereo connection (patch) lead to the interface box
2. Connect the opposite end of the stereo connection (patch) lead to the steering wheel control input on the back of the aftermarket stereo

*NOTE: This may be a 3.5mm jack connector or a wired input depending on the brand of aftermarket stereo being fitted. Please consult the aftermarket stereo installation manual for further information on where to make the connection*

**IMPORTANT: THIS STEP MUST BE COMPLETED BEFORE CONNECTING POWER TO THE INTERFACE. FAILURE TO DO SO MAY RESULT IN A LACK OF FUNCTIONALITY AND THE NEED TO RE-INSTALL THE PRODUCT**

3. Connect the 14 Pin connector from the supplied wiring loom to the interface box
4. Connect the male power/speaker ISO connector to the female power/speaker ISO connector from the aftermarket stereo.

*NOTE: For aftermarket stereos which do not have an ISO connector, please see "Wiring Key" on Pg.2 for information on which wires to connect. Some interfaces may also have additional 'flying' wires which can be connected to the vehicle to support various features ie. parking brake trigger, reverse gear and speed pulse. Details of these can be found under 'Additional Connections'.*

5. Connect both the vehicle specific connector/s on the supplied harness to the corresponding connection from the vehicle.
6. Test stereo and steering wheel control functionality for correct operation before reassembling the vehicle dashboard. If steering wheel control functions are unresponsive, please uninstall the interface and wiring and reinstall carefully in accordance with the above steps.

***For further help and support, please contact us with the full details of your issue at [support.connects2.com/tickets/technical](https://support.connects2.com/tickets/technical)***

# WIRING DIAGRAM

## Vehicle Specific Connectors

Connect to relevant connectors from vehicle

## Male ISO Connector

Connect to aftermarket stereo

